

Wheel Features

Tread Material:	PU	Core Material:	High Strength PP
Bearing:	Single Ball Bearing	Tread Hardness:	95A±3
Temperature:	-20°C~50°C	Running Speed:	4km/h

Note: Use beyond temperature range or beyond the recommended speed may shorten product life or even damage the product.



- ✔ Precision ball bearing,flexible rotation
- ✔ Injection polyurethane,glue-free self lock structureoil resistance,wear resistance
- ✔ Environmental protection,quiet,effectively protect the floor
- ⚠ High temperature and humidity may shortened service life





Rolling resistance	■ ■ ■ ■ □	Very good
Wear resistance	■ ■ ■ ■ ■	Excellent
Operating noise	■ ■ ■ ■ □	Very good
Floor surface preservation	■ ■ ■ ■ □	Very good

Bracket Features


- ✔ Easy to operate,convenient to release the brake
- ✔ Spindle equipped with precision bearing,quiet and flexible
- ✔ Nylon-injection core,lightweight and tough
- ✔ Galvanized,salt spray test over 48 hours
- ✔ This product has passed TUV certification.Utility model patent owned,protected by intellectual property law.

Parameter (mm)							
Wheel Size	Capacity	Wheel Dia.	Wheel Width	Total Height	Offset	Swivel Radius	Swivel Radius
4"	100 kg	100	18	125.5	30	80	108
5"	130 kg	125	18	155.5	37.5	100	135
Wheel Size	Total height	Total height					
4"	123	115					
5"	155	145					



[English]

Mounting Drawing

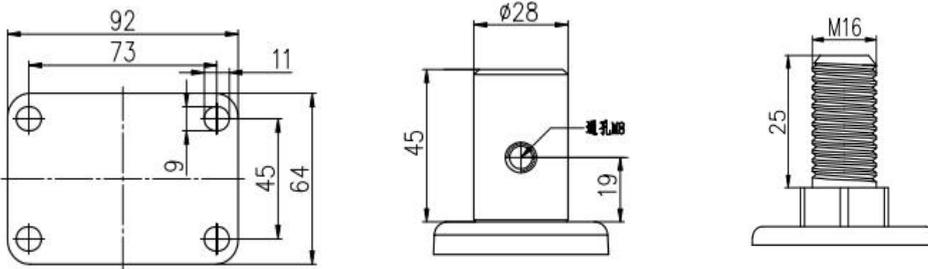

Product ID						
Wheel Size	Plate swivel	Plate fixed	Threaded stem	Threaded stem brake	Stem of swivel	Stem of brake
4"	80T03-1695	80T04-1695	80T21-1695	80T22-1695	80T15-1695	80T16-1695
5"	80T05-1696	80T06-1696	80T23-1696	80T24-1696	80T17-1696	80T18-1696

Product Details



Split brake is easy to operate.

Nylon bracket is Integrated injection molding, front and back body are surrounded with high strength.



Double Polyurethane wheel is silent, wear resistant and has high load capacity.

